

# PORTABLE DAVIT CRANES OPTIONS & ACCESSORIES

## 5122 Series Winch Options

M4022PB-K



Model	Description	Approx. Ship Wt. (kg)
M1	<b>M4022PB-K</b> - Zinc plated spur gear hand winch - equipped with automatic disc brake	8
M3	<b>M4042PBSS-K</b> - Stainless steel spur gear hand winch - equipped with automatic disc brake	11

M4312PBSS-K



4WM2-K



4WP2-K



## 5110 / 5124 Series Winch Options


Model	Description	Approx. Ship Wt. (kg)
M1	<b>M4312PB-K</b> - Zinc plated spur gear hand winch - equipped with automatic disc brake	13
M3	<b>M4312PBSS-K</b> - Stainless steel spur gear hand winch - equipped with automatic disc brake	11
M2*	<b>4WM2-K</b> - Powder coated worm gear hand winch - equipped with internal mechanical brake	20
E2*	<b>4WP2-K</b> - Enamel finished electric winch - equipped with internal mechanical brake - 115/1/50 or 230/1/50 VAC - 2 m pendant control	39

\* Available in epoxy finish. Please contact distributor.

### All Winches are Equipped with One of the Following:

- **Quick Disconnect Anchor** for quickly attaching or removing wire rope with a swaged ball fitting.
- **Flange Clip Anchor** for simple and solid fix of wire rope.

Quick Disconnect Anchor

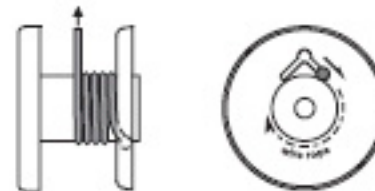

Flange Clip Anchor



Thern products are not for lifting people or things over people.





# PORTABLE DAVIT CRANES OPTIONS & ACCESSORIES

Cable Spool



Rope Keeper



Base Cover



## Portable Davit Cranes Accessories

Item	Description	Approx. Ship Wt. (kg)
<b>Cable Spool RW50</b>	316 stainless steel reel winds up wire rope when detached from crane.	6
<b>Wire Rope Keeper B1766</b>	Metal bracket attaches to base or other structure to hold free end of wire rope when detached from crane. Equipped with quick disconnect for quickly attaching and removing wire rope with a swaged ball fitting.	N/A
<b>Base Cover 5122 - TK2P 5110 - TK3P 5124 - TK4P</b>	Plastic cover fits in the mast hole in the base to help keep water from collecting inside the base when crane is removed.	N/A

### 5122 Series Wire Rope Assemblies

Rope Diameter	Wire Rope Length	Lift Below Floor*	
		min (m)	max (m)
4,8 (mm)	5,0 (m)	1,5	1,8
4,8	10,0	6,7	7,0
4,8	15,0	11,5	11,8
4,8	20,0	16,4	16,7

\* Lift below floor level varies depending on boom position and base configuration. For longer lifts contact factory.

### 5110 Series Wire Rope Assemblies

Rope Diameter	Wire Rope Length	Lift Below Floor*	
		min (m)	max (m)
6,4 (mm)	5,0 (m)	- 0,6	0,3
6,4	10,0	4,2	5,4
6,4	15,0	9,1	10,3
6,4	20,0	14,3	15,5

\* Lift below floor level varies depending on boom position and base configuration. For longer lifts contact factory.

### 5124 Series Wire Rope Assemblies

Rope Diameter	Wire Rope Length	Lift Below Floor*	
		min (m)	max (m)
6,4 (mm)	5,0 (m)	- 1,2	- 0,3
6,4	10,0	3,9	5,1
6,4	15,0	8,8	10,0
6,4	20,0	14,0	15,2
8,0	5,0	- 1,2	- 0,3
8,0	10,0	3,9	5,1
8,0	15,0	8,8	10,0

\* Lift below floor level varies depending on boom position and base configuration. For longer lifts contact factory.



Thern products are not for lifting people or things over people.

